

# DX15


DX SERIE

DX15 featured 15inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 97dB, maximum 131dB. Power handling instantaneous can afford up to 2400 watts in peak. greater mechanical mobile distance also brought more mass and volume. Effectively compressed air, with the high power output also can keep lower distortion and good linear response, kept good Sound reduction as well.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	40Hz-500Hz
Frequency Range (±3dB)	45Hz-400Hz
Rated Power	600W
Maximun Power	2400W
Sensitivity(1w/1m)	97dB
Maximum SPL	131dB
Loudspeakers	1x15"
X-over	120Hz/24dB/octave
Nominal Impedance	8Ω
Connections	2xNLT4±1

Physical Performance	
Hoisting Way	16 Hoisting Point with M8
Size(WxDxH)	460x700x480(mm)
Weight	N.W:40kg R.W:44kg

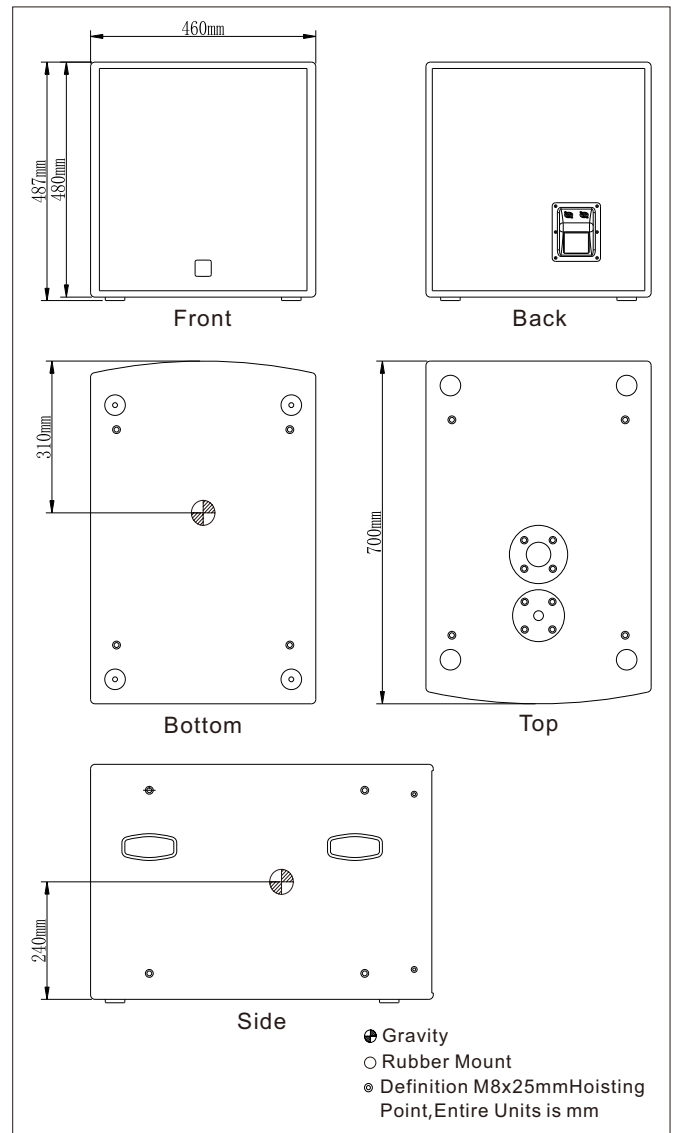

Frequency Response&Impedance

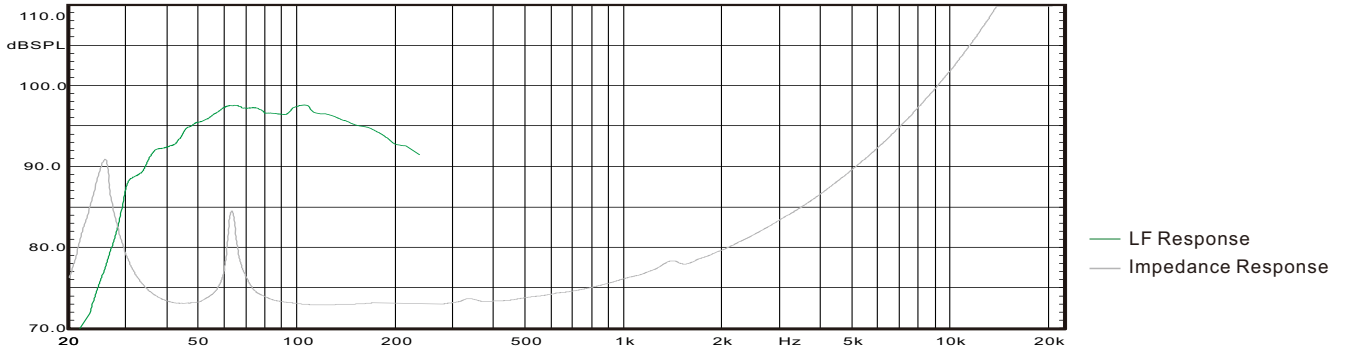

Phase Curve

