

DX215AP

DX SERIE

DX215AP featured dual 15inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, DX215AP featured CLASS-D AMP, provided small size, light weight, high efficiency, lower exothermic characteristic. Configuration work with DX215AP to extend Low-frequency. DX215AP also featured DSP processor with processing parameters, can obtain carefully processed frequency response, corrected phase.




Acoustic Performance


System	Subwoofer
Frequency Range (-10dB)	35Hz-300Hz
Frequency Range (±3dB)	45Hz-250Hz
Rated Power	1200W
Maximun Power	4800W
Sensitivity(1w/1m)	99dB
Maximum SPL	136dB
Loudspeakers	2x15"
X-over	120Hz/24dB/octave
Nominal Impedance	4Ω
Connections	Module/1input&1outpuy 1200w/1xNLT4

Physical Performance

Hoisting Way	16 Hoisting Point with M8
Size(WxDxH)	800x643x520(mm)
Weight	N.W:65kg R.W:70.7kg

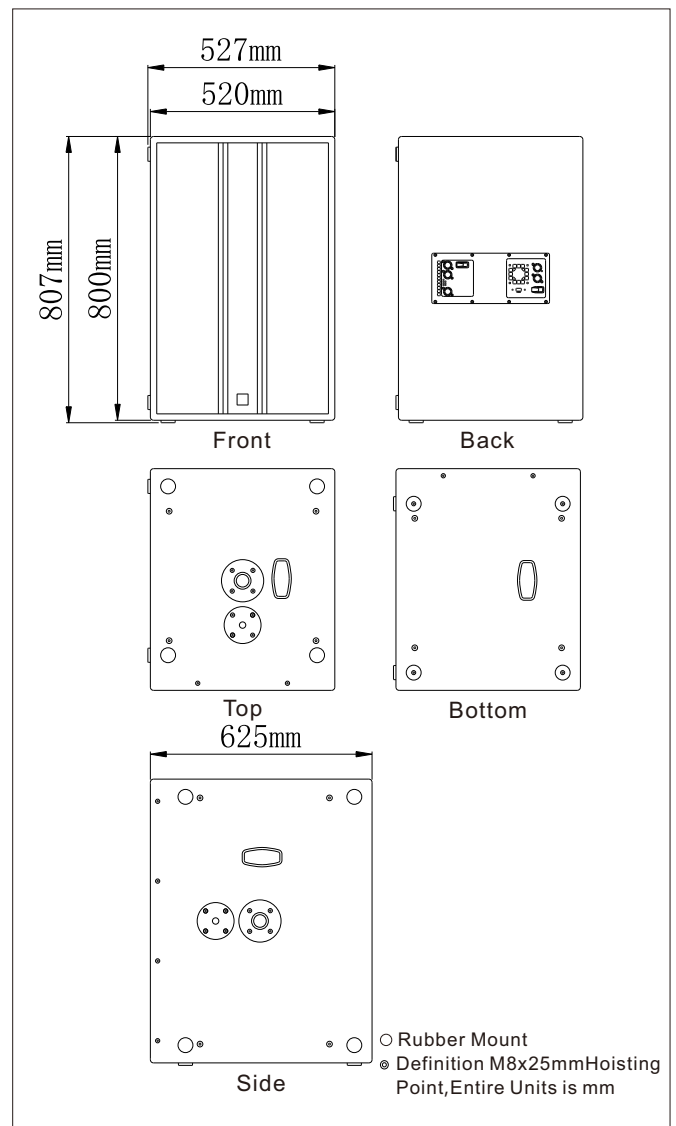

Frequency Response&Impedance

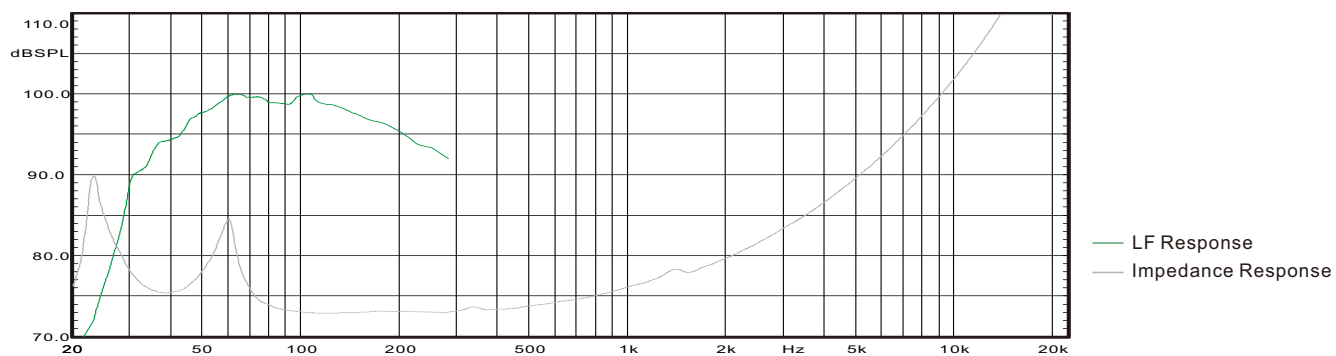

Phase Curve

