

DCM06


DCM SERIES

Coaxial speaker design, DCM06 possesses full range frequency response and fidelity phase, Achieving the point source in a standard form output more natural sound. At the same time also has a powerful force in points in high and low frequency response, makes it sound levels more clear, details are more prominent dainty volume, convenient installation, can be widely applied to various speakers installed on limit of site meet the demand of the use of multi-functional, ideal applications include conference rooms, classrooms, bar.




Acoustic Performance	
System	2-way Loudspeaker System
Frequency Range(-10dB)	70Hz-18kHz
Frequency Range(±3dB)	100Hz-17kHz
Dispersion Angle	90°x90°(HxV)
Rated Power	60W
Maximum Power	240W
Sensitivity(1w/1m)	89dB
Maximum SPL	113dB
Loudspeakers	LF:1x6" HF:1x1"
Nominal Impedance	8Ω
Connections	Connectio with 4pin


Physical Performance	
Hoisting Way	10 Hoisting Point with M8 &Hang Parts
Size(WxDxH)	220x247x358(mm)
Weight	N.W:8.5kg R.W:11.3kg

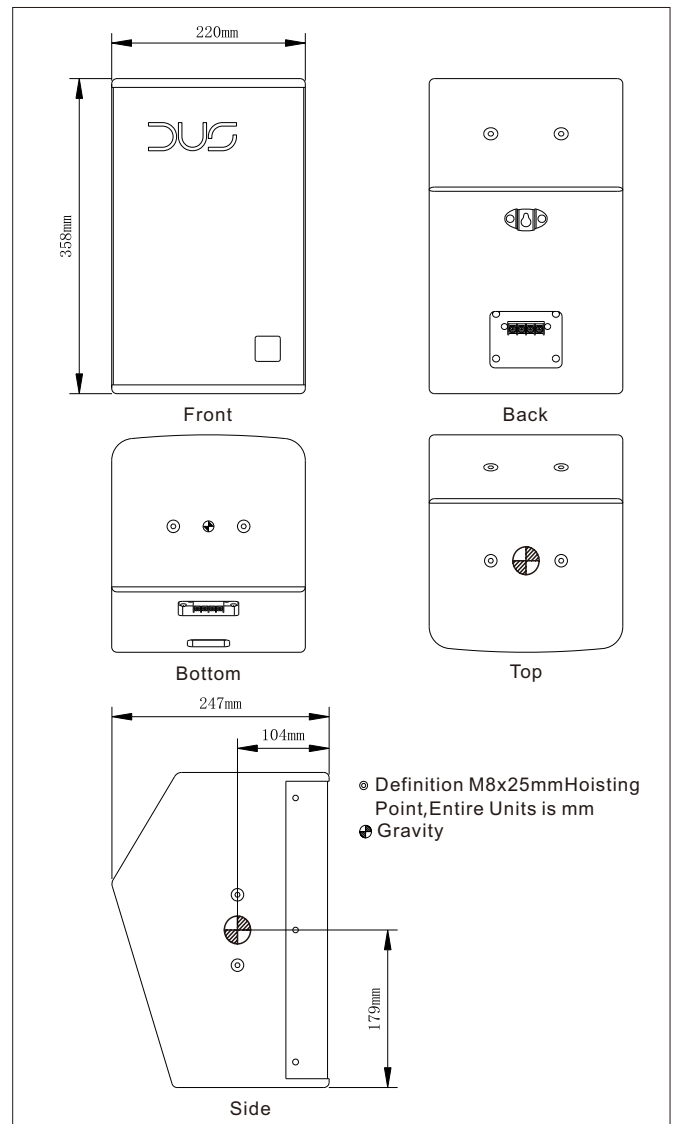

Frequency Response & Impedance

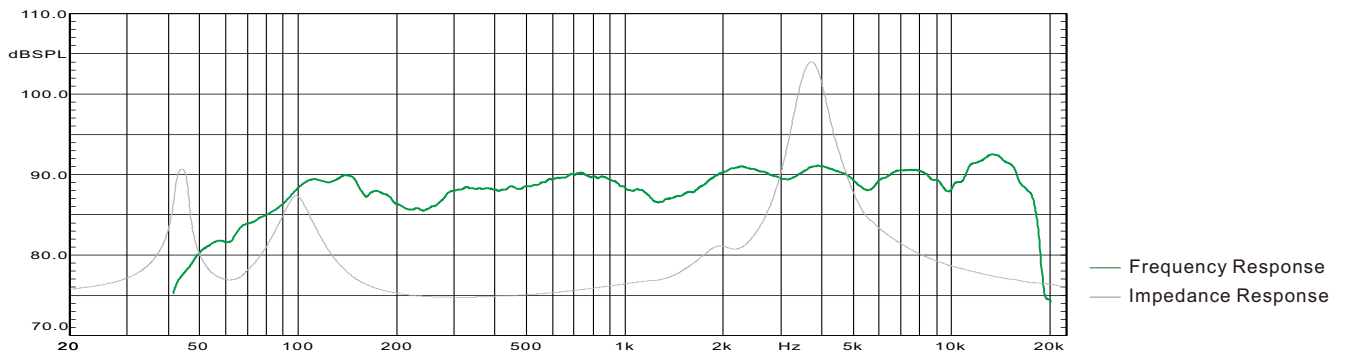

Frequency Response

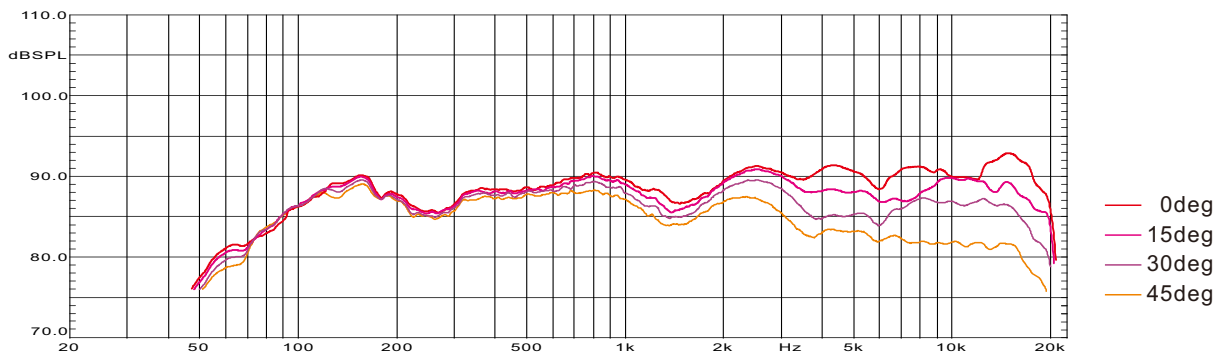

Phase Curve

