

DCM115


DCM SERIES

Coaxial speaker design with one 15inch woofer and 3inch high frequency driver. DCM115 possesses full range frequency response and fidelity phase, Achieving the point source in a standard form output more natural sound. At the same time also has a powerful force in points in high and low frequency response, makes it sound levels more clear, details are more prominent dainty volume, convenient installation, can be widely applied to various speakers installed on limit of site meet the demand of the use of multi-functional, ideal applications include conference rooms, classrooms, bar, stage monitor.




Acoustic Performance	
System	2-way Loudspeaker System
Frequency Range(-10dB)	50Hz-18kHz
Frequency Range(±3dB)	55Hz-17kHz
Dispersion Angle	90°x90°(HxV)
Rated Power	450W
Maximum Power	1800W
Sensitivity(1w/1m)	98dB
Maximum SPL	129dB
Loudspeakers	LF:1x15" HF:1x3"
Nominal Impedance	8Ω
Connections	2xNLT4±1


Physical Performance	
Hoisting Way	17 Hoisting Point with M8 &Hang Parts
Size(WxDxH)	446x502x601(mm)
Weight	N.W:26.5kg R.W:30kg

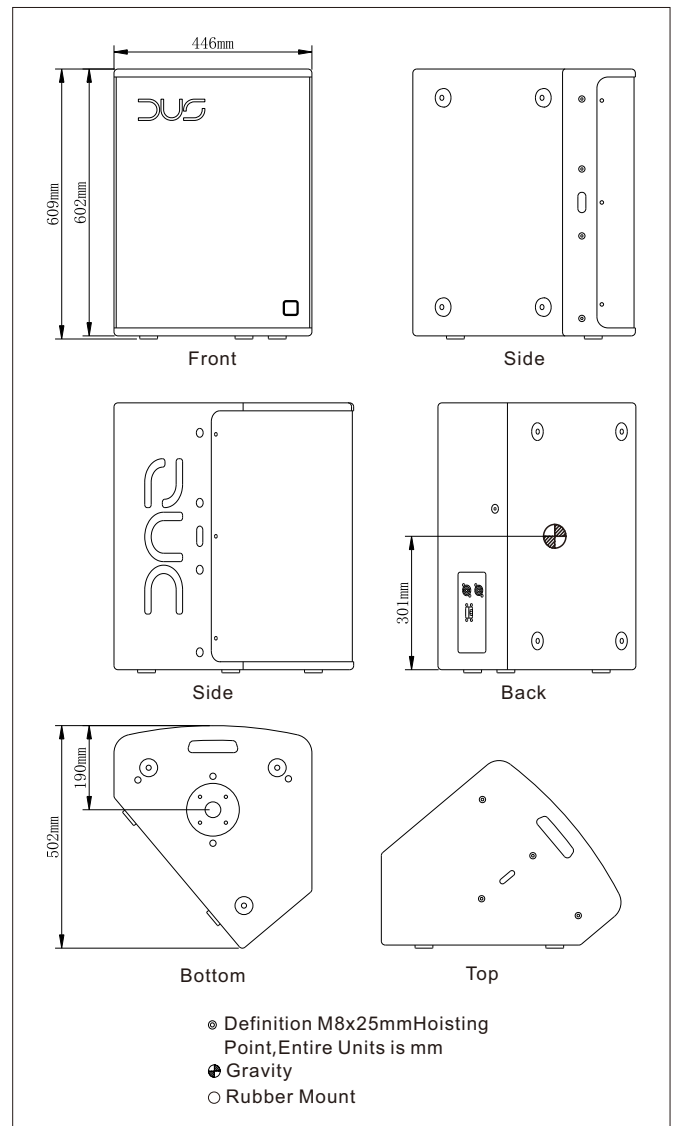


Frequency Response & Impedance

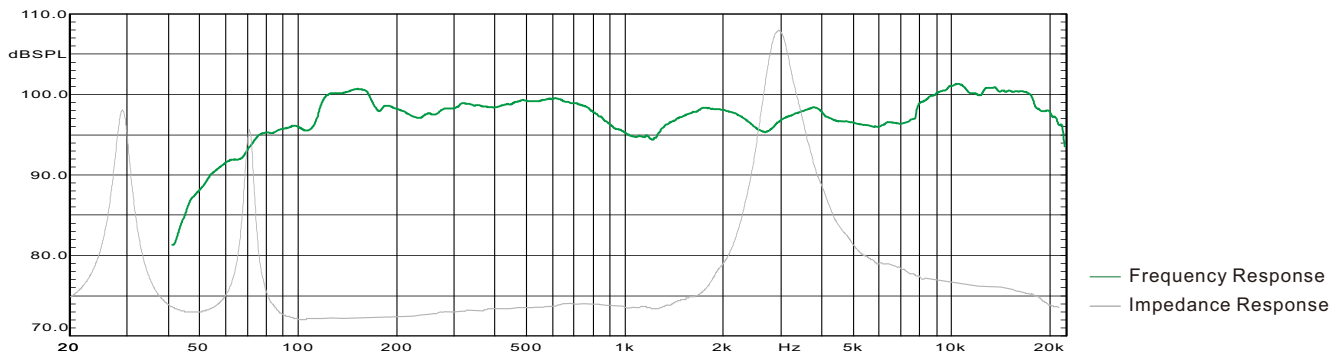

Frequency Response in Normal

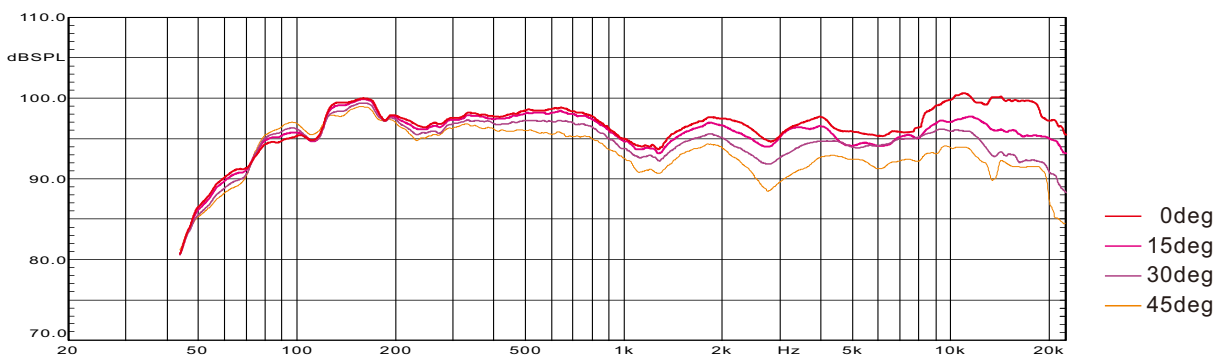

Frequency Response in HF Boost

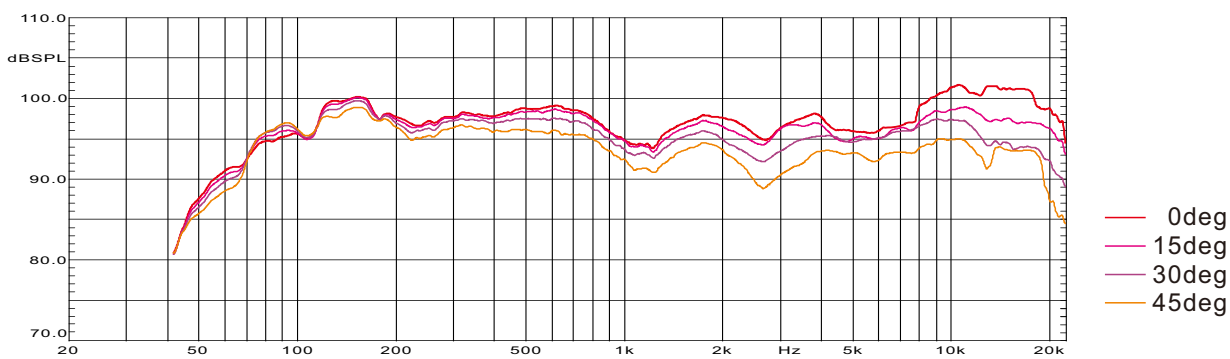

Phase Curve

