


# CLUB ONE


CLUB SERIES

CLUB ONE are ideally suited for thumping club performance and large-scale installations. Same as diverse tools with different function, regard to high performance output needs in limited height space, CLUB ONE design with high frequency fast drop off characteristic can be provide same acoustic energy for the far distance. CLUB ONE featured dual 10inch low-frequency transducers and a 3inch compression driver full frequency speaker. The wave guide design for 90 degree X 10 degree of horizontal and vertical coverage. Singly mounting can be propitious to height limited space. With combining matrix also can be propitious for large space. CLUB ONE speaker can be widely used for middle to small size theatre, school, auditorium, sports, hotel ballroom, Live House venue.


CLUB ONE configured with fast installation hanging accessories and 4pins connector will be completed quickly install 2pcs together with less work and time.

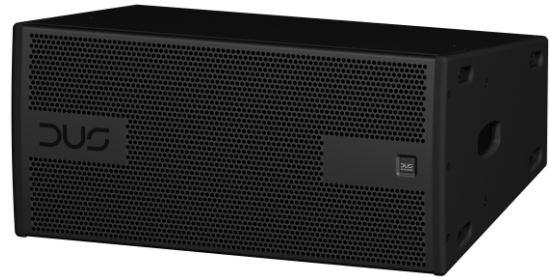


Acoustic Performance	
System	2-way Matrix
Frequency Range (-10dB)	60Hz-2.5kHz(LF) 800Hz-18kHz(HF)
Frequency Range (±3dB)	70Hz-2kHz(LF) 900Hz-17.5kHz(HF)
Dispersion Angle	90° x 10° ( HxV )
Rated Power	500W(LF)/75W(HF)
Maximun Power	2000W(LF)/300W(HF)
Sensitivity(1w/1m)	100dB(LF)/107dB(HF)
Maximum SPL	133dB(LF)/132dB(HF)
Loudspeakers	LF:2x10" HF:1x3"
X-over	1.5kHz/24dB/octave
Nominal Impedance	8Ω(LF)/8Ω(HF)
Connections	2xNLT4±1(LF)/±2(HF)
Physical Performance	
Hoisting Way	25 Hoisting Point with M8
Size(WxDxH)	700x500x338(mm)
Weight	N.W:37.5kg R.W:52.3kg

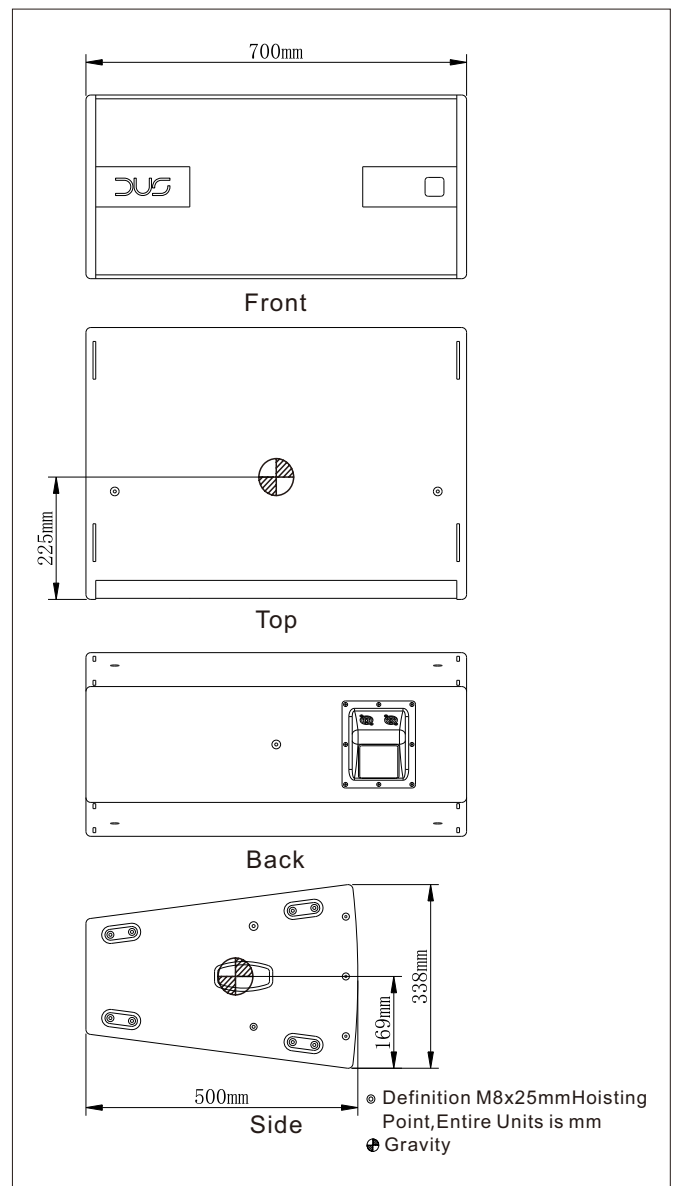


Frequency Response&Impedance

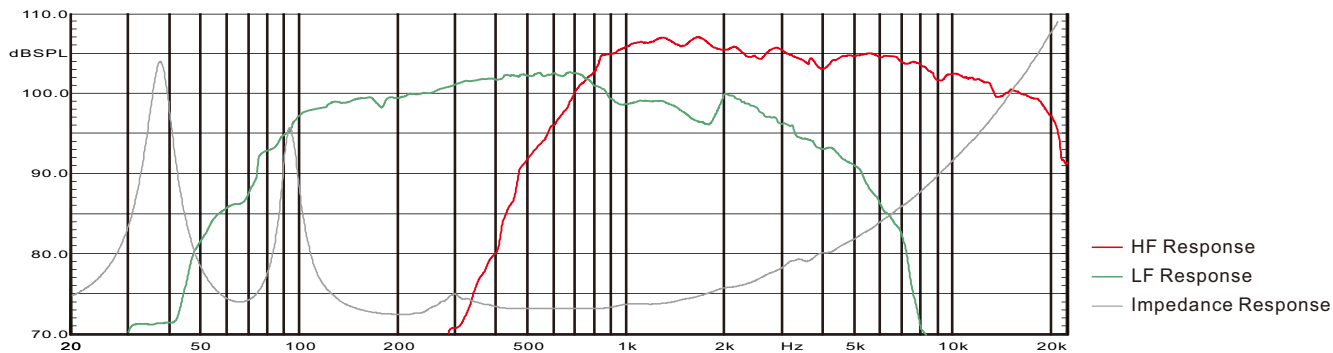

Frequency Response in Horizontal

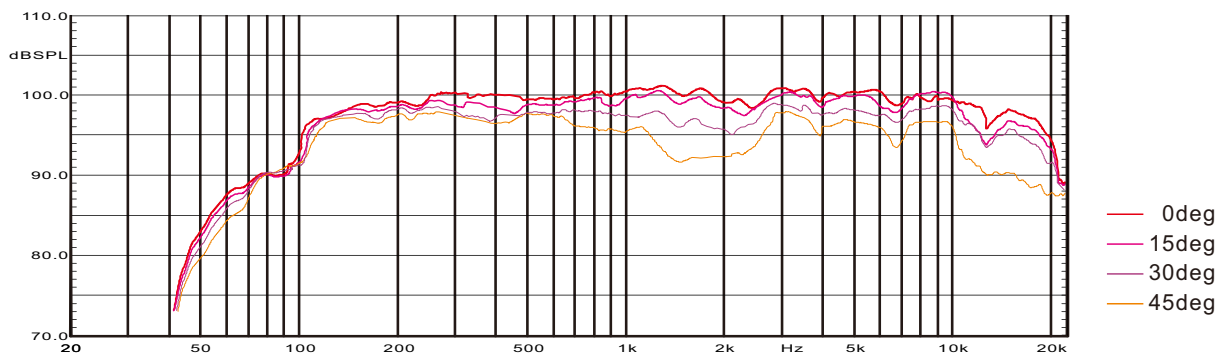

Frequency Response in Vertical

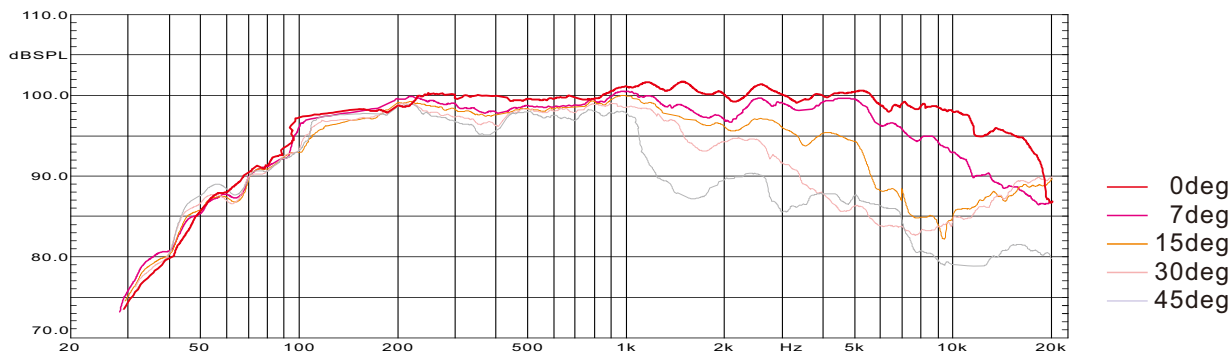

Phase Curve

