

# HE501


HE SERIES

HE501 is a two-way passive micro speaker designed for discreet positioning in architectural installations. HE501 featured 5inch low-frequency transducers and two 1inch cloth dome tweeters. Including U bars easy for quickly installations. can be widely applied to Bars restaurants, museums and AV space.




## Acoustic Performance

System	2-way Loudspeaker System
Frequency Range(-10dB)	110Hz-20kHz
Frequency Range(±3dB)	120Hz-18kHz
Dispersion Angle	70°x60°( HxV )
Rated Power	120W
Maximum Power	480W
Sensitivity(1w/1m)	92dB
Maximum SPL	119dB
Loudspeakers	LF:1x5" HF:2x1"
Nominal Impedance	8Ω
Connections	1 Connector

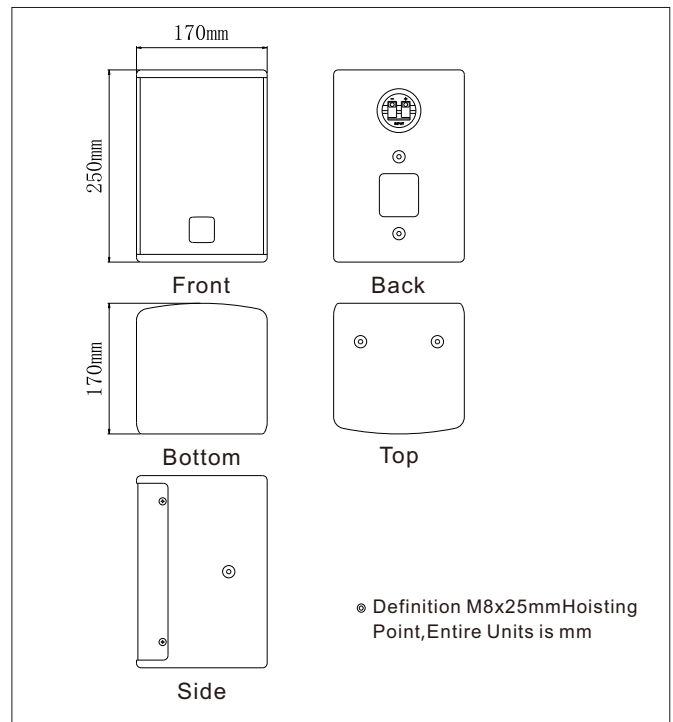


## Physical Performance


Hoisting Way	6 Hoisting Point with M8
Size(WxDxH)	170x170x250(mm)
Weight	N.W:4kg R.W:6kg

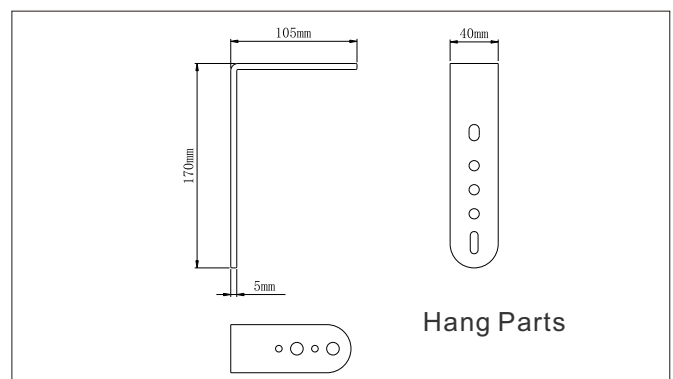


### Frequency Response & Impedance

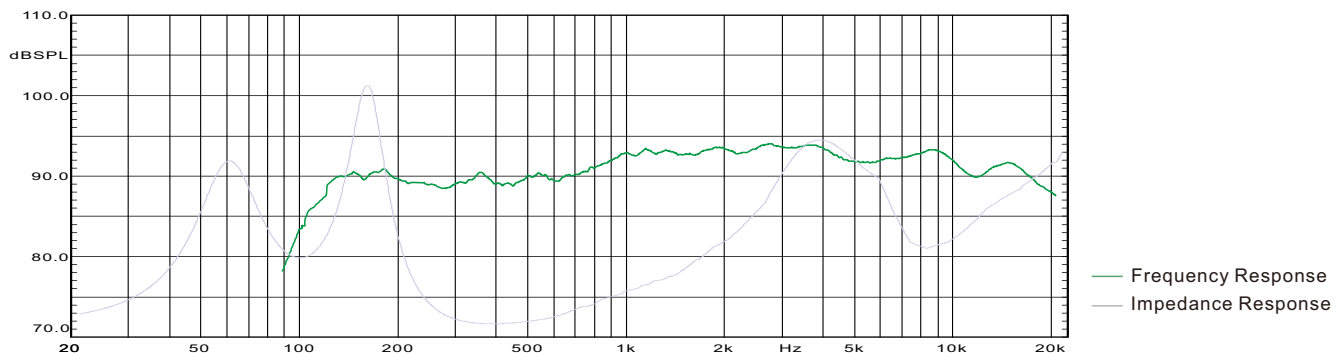

### Frequency Response in Horizontal

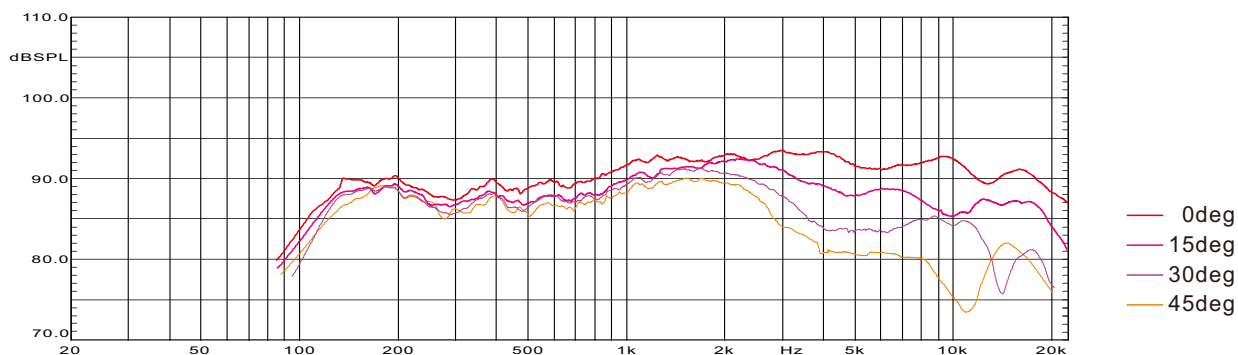

### Frequency Response in Vertical

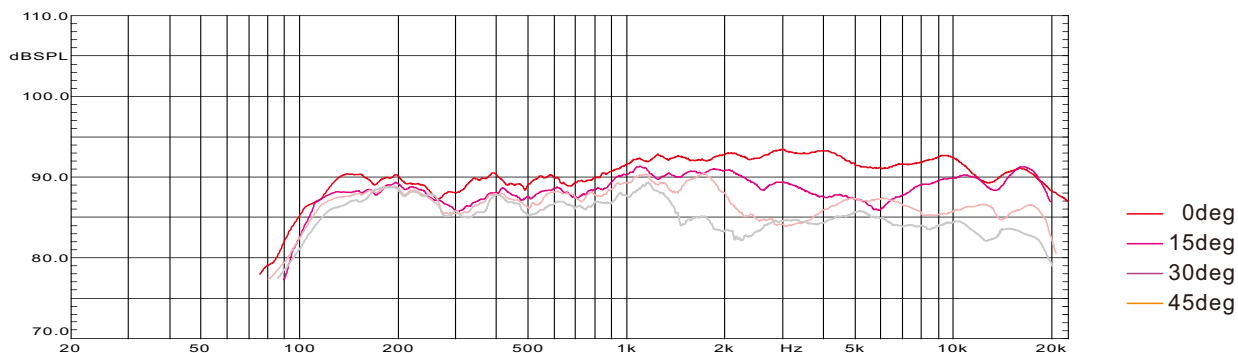

### Phase Curve

