

DXB300


DXB SERIES

DXB300 featured double 8inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 94dB, maximum 124dB. Compact size efficiency output can be placed in any corner, cooperate DX4.1&DX5.1, can be used for small meals, multi-functional conference room, household hi-fi stereo etc. The high quality of amplification.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	30Hz-400Hz
Frequency Range (± 3 dB)	40Hz-300Hz
Rated Power	300W
Maximun Power	1200W
Sensitivity(1w/1m)	94dB
Maximum SPL	124dB
Loudspeakers	2x8"
Nominal Impedance	4 Ω
Connections	2xNLT4 \pm 1

Physical Performance	
Size(WxDxH)	250x500x515(mm)
Weight	N.W:15kg R.W:18.5kg

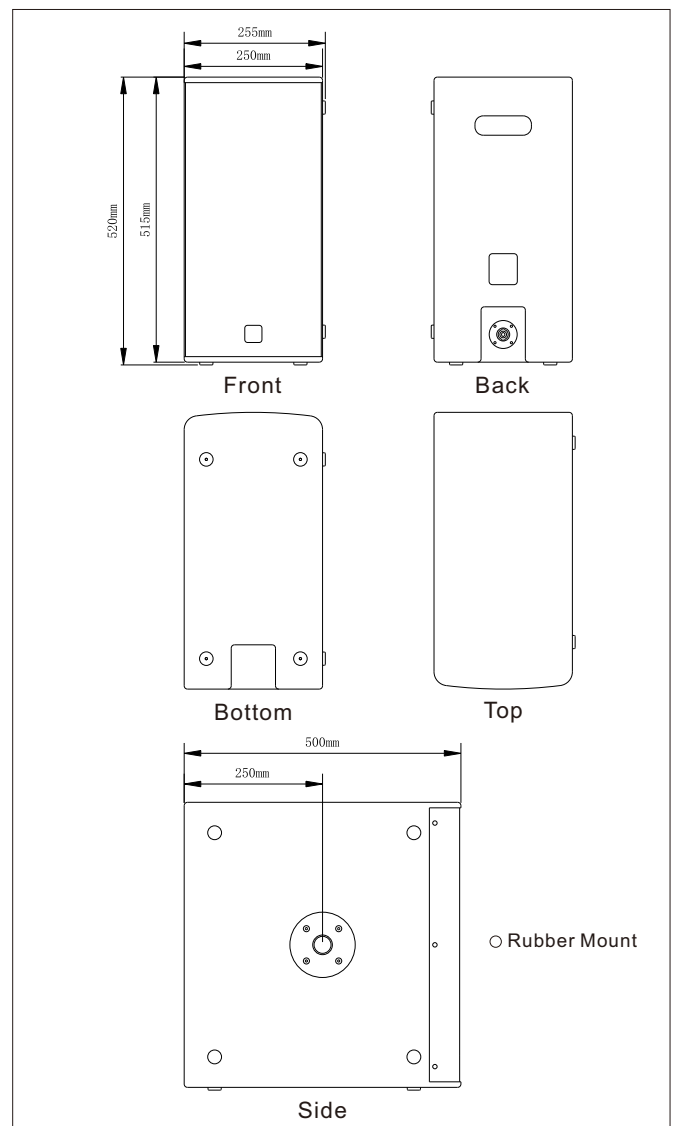

Frequency Response&Impedance

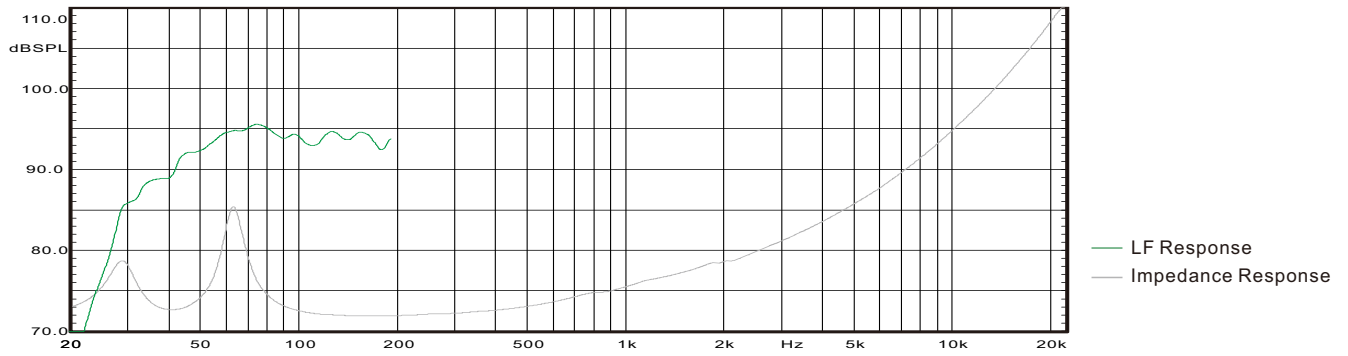

Phase Curve

