

# DSW1500


DSW SERIES

DSW1500 featured 18inch low-frequency transducers with high-power configuration. capacity available to deliver an impressive 132dB at Frequency range from 35Hz to 300Hz. Cooperate with other DUS AUDIO full range speakers attain to extend and expand low Frequency. DSW1500 Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity. Power handling instantaneous can afford up to 5200 watts in peak. greater mechanical mobile distance also brought more mass and volume. Effectively compressed air, with the high power output also can keep lower distortion and good linear response, kept good Sound reduction as well.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	35Hz-300Hz
Frequency Range (±3dB)	40Hz-250Hz
Rated Power	600W
Maximun Power	2400W
Sensitivity(1w/1m)	98dB
Maximum SPL	132dB
Loudspeakers	1x18"
Nominal Impedance	8Ω
Connections	2xNLT4±1

Physical Performance	
Hoisting Way	16 Hoisting Point with M8
Size(WxDxH)	560x820x600(mm)
Weight	N.W:42.5kg R.W:47.5kg

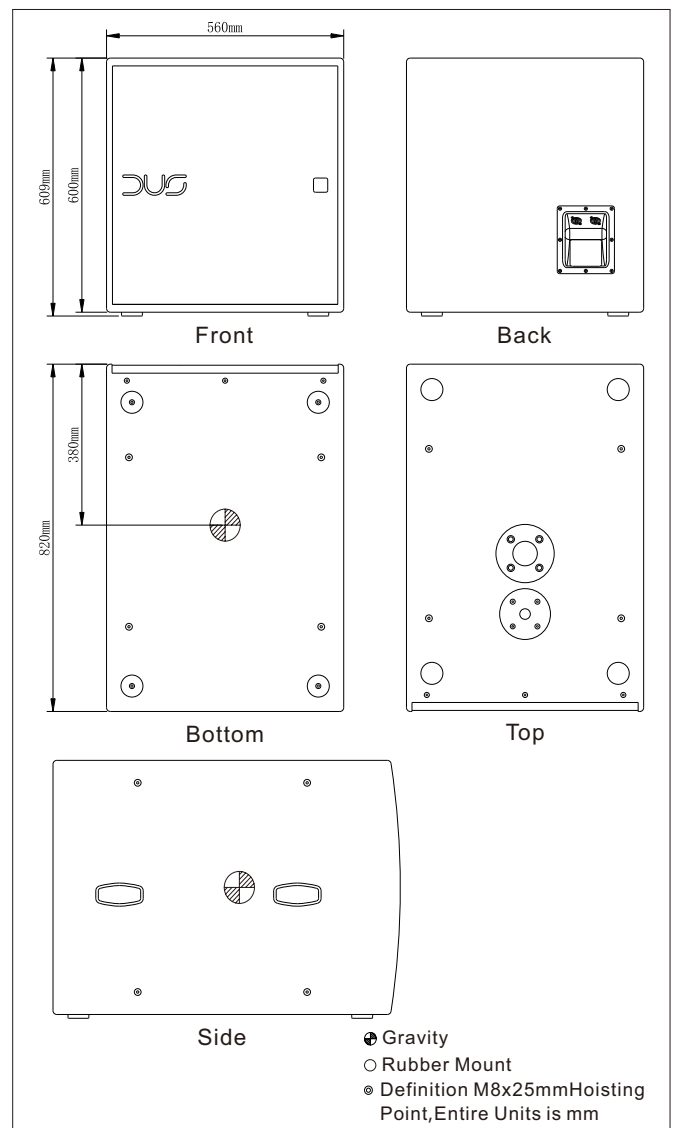

Frequency Response&Impedance

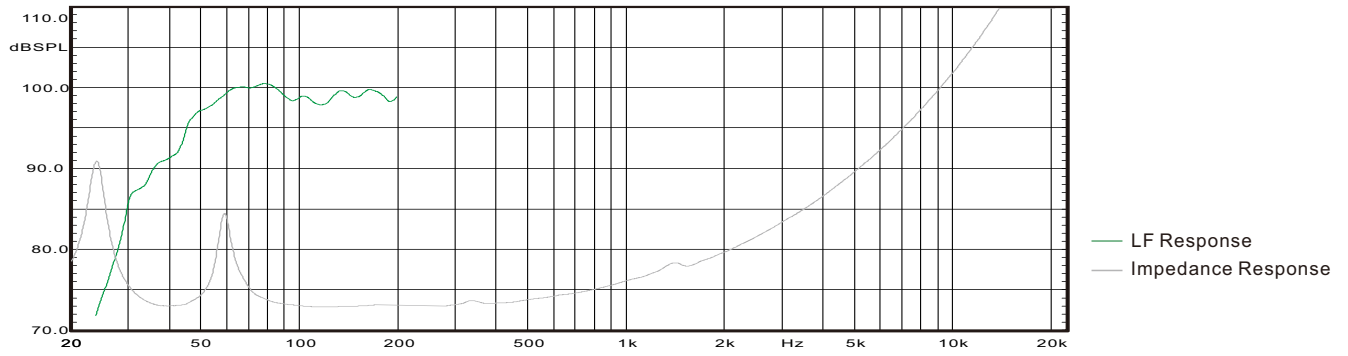

Phase Curve

