

# HE504

HE SERIES

HE504 featured 4piece 5inch low-frequency transducers with 12piece 1inch cloth dome tweeters. HE504 with precise phase, balanced frequency response, constant directivity coverage. Multiple tweeters set up enhanced directivity, same time be beneficial to increase the SPL. cooperate with other product from HE series will be AV space configuration.




## Acoustic Performance


System	2-way Loudspeaker System
Frequency Range(-10dB)	90Hz-20kHz
Frequency Range(±3dB)	100Hz-20kHz
Dispersion Angle	70°x40°( HxV )
Rated Power	500W
Maximum Power	2000W
Sensitivity(1w/1m)	97dB
Maximum SPL	130dB
Loudspeakers	LF:4x5" HF:12x1"
Nominal Impedance	8Ω
Connections	2xNLT4±1

## Physical Performance


Hoisting Way	4 Hoisting Point with M8
Size(WxDxH)	235x175x585(mm)
Weight	N.W:13.5kg R.W:16.5kg

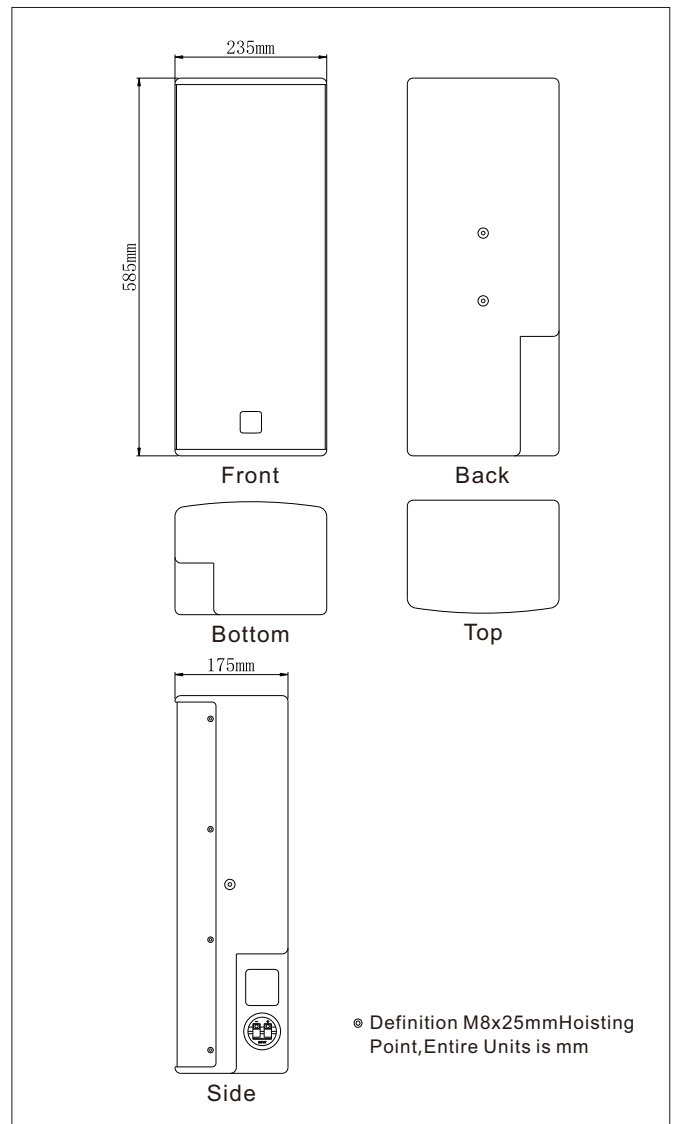


Frequency Response & Impedance

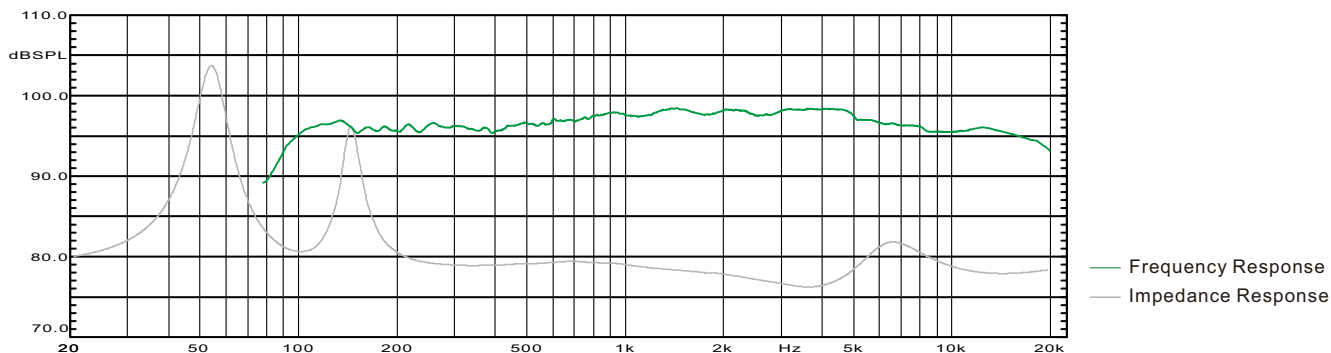

Frequency Response in Horizontal

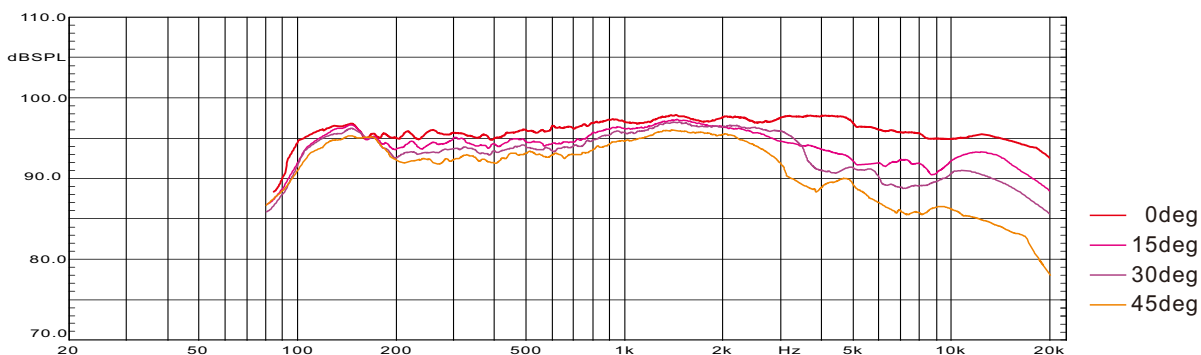

Frequency Response in Vertical

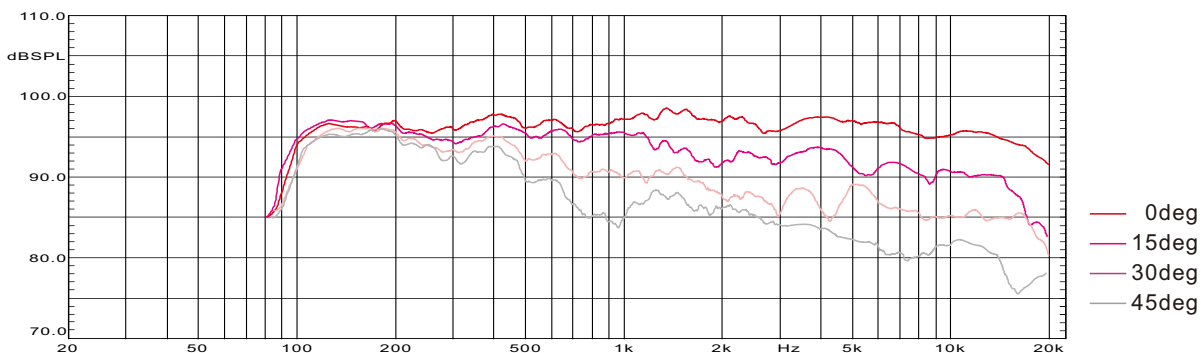

Phase Curve

