

# DSW12

DSW SERIES

DSW12 featured 12inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 97dB, maximum 129dB. Compact size efficiency output can be placed in any corner, cooperate DX4.1&DX5.1, can be used for small meals, multi-functional conference room, household hi-fi stereo etc. The high quality of amplification.




### Acoustic Performance


|                               |                |
|-------------------------------|----------------|
| System                        | Subwoofer      |
| Frequency Range (-10dB)       | 40Hz-300Hz     |
| Frequency Range ( $\pm 3$ dB) | 45Hz-250Hz     |
| Rated Power                   | 400W           |
| Maximun Power                 | 1600W          |
| Sensitivity(1w/1m)            | 97dB           |
| Maximum SPL                   | 129dB          |
| Loudspeakers                  | 1x12"          |
| Nominal Impedance             | 8 $\Omega$     |
| Connections                   | 2xNLT4 $\pm$ 1 |

### Physical Performance

|             |                       |
|-------------|-----------------------|
| Size(WxDxH) | 360x550x680(mm)       |
| Weight      | N.W:30.5kg R.W:33.5kg |

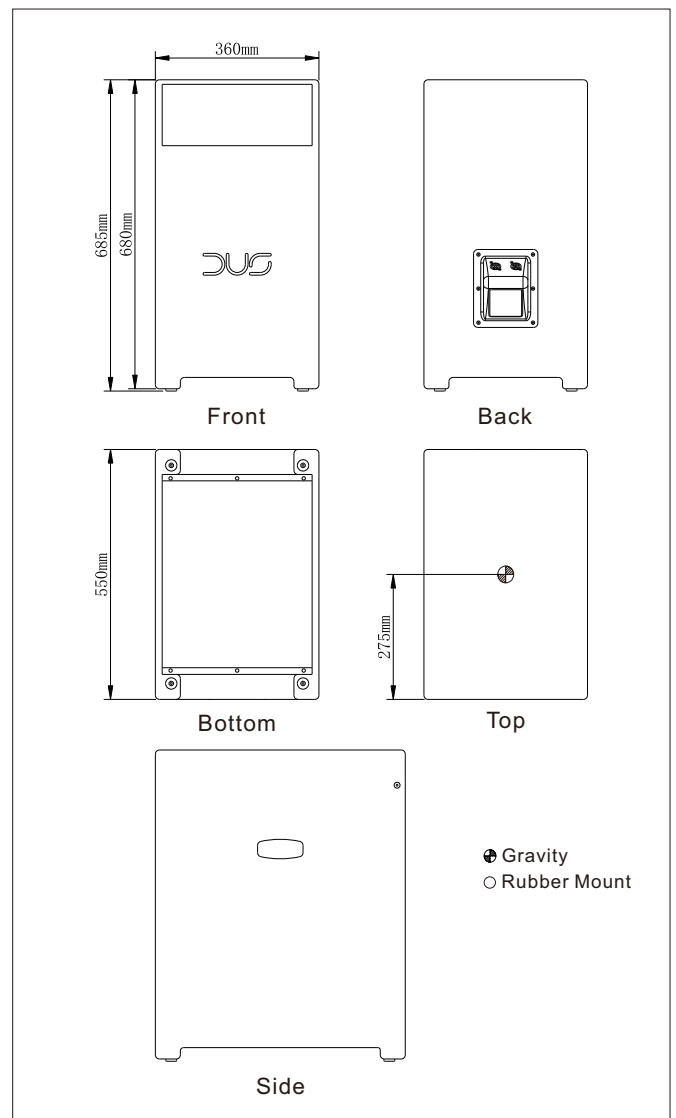

Frequency Response&Impedance

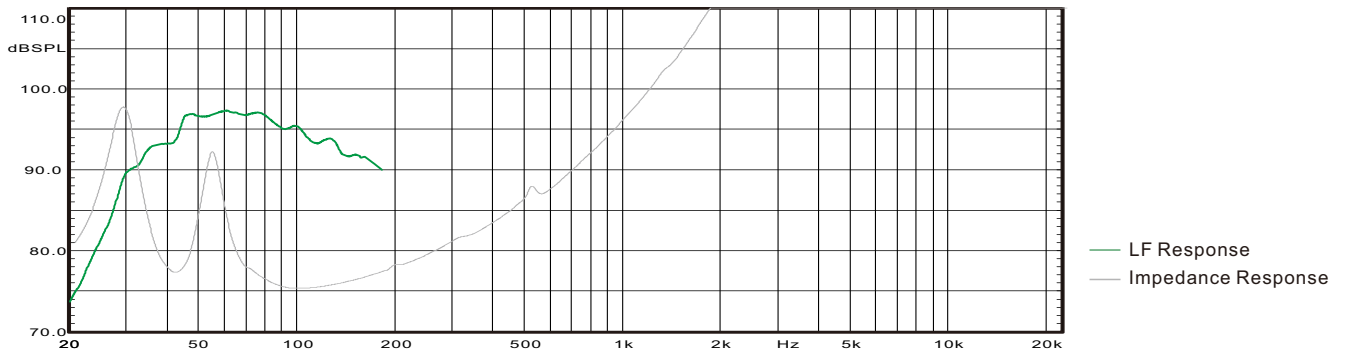

Phase Curve

