

# DSW10AP

DSW SERIES


DX10AP featured 10inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 95dB, maximum 126dB. DX15AP featured CLASS-D AMP, provided small size, light weight, high efficiency, lower exothermic characteristic. Configuration work with DSW10 to extend Low-frequency.

DX10AP also featured DSP processor with processing parameters, can obtain carefully processed frequency response, corrected phase.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	40Hz-300Hz
Frequency Range (±3dB)	50Hz-250Hz
Rated Power	300W
Maximun Power	1200W
Sensitivity(1w/1m)	95dB
Maximum SPL	126dB
Loudspeakers	1x10"
Nominal Impedance	8Ω
Connections	Module/1input&1outpuy 800W/1xNLT4

Physical Performance	
Size(WxDxH)	310x550x600(mm)
Weight	N.W:26kg    R.W:30.5kg

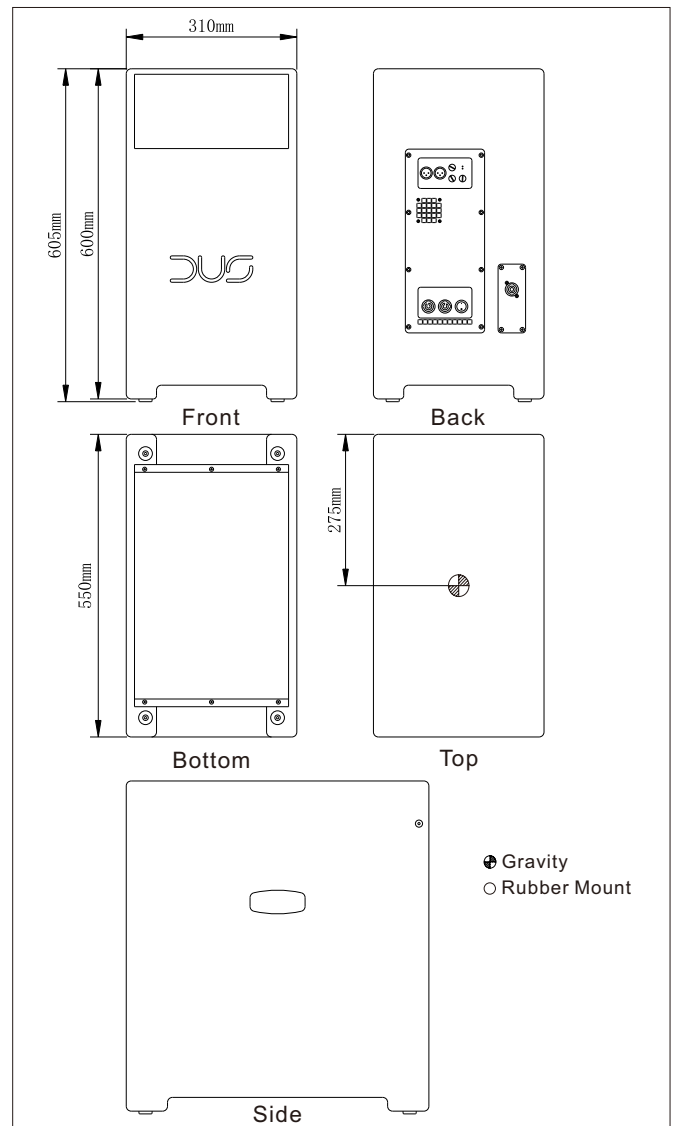

Frequency Response&Impedance

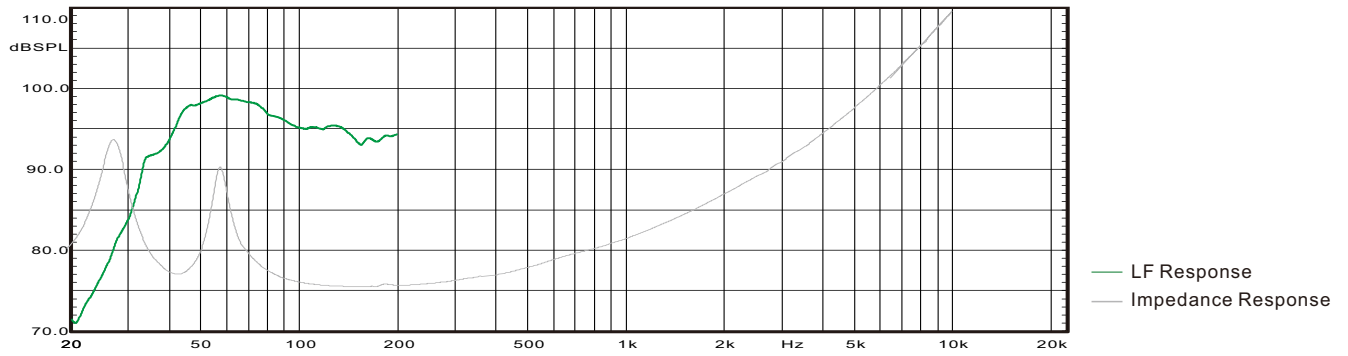

Phase Curve

