

DSW10

DSW SERIES

DSW10 featured 10inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 95dB, maximum 126dB. Compact size efficiency output can be placed in any corner, cooperate DX4.1&DX5.1, can be used for small meals, multi-functional conference room, household hi-fi stereo etc. The high quality of amplification.




Acoustic Performance


System	Subwoofer
Frequency Range (-10dB)	40Hz-300Hz
Frequency Range (±3dB)	50Hz-250Hz
Rated Power	300W
Maximun Power	1200W
Sensitivity(1w/1m)	95dB
Maximum SPL	126dB
Loudspeakers	1x10"
Nominal Impedance	8Ω
Connections	2xNLT4±1

Physical Performance

Size(WxDxH)	310x550x600(mm)	
Weight	N.W:26kg	R.W:30.5kg

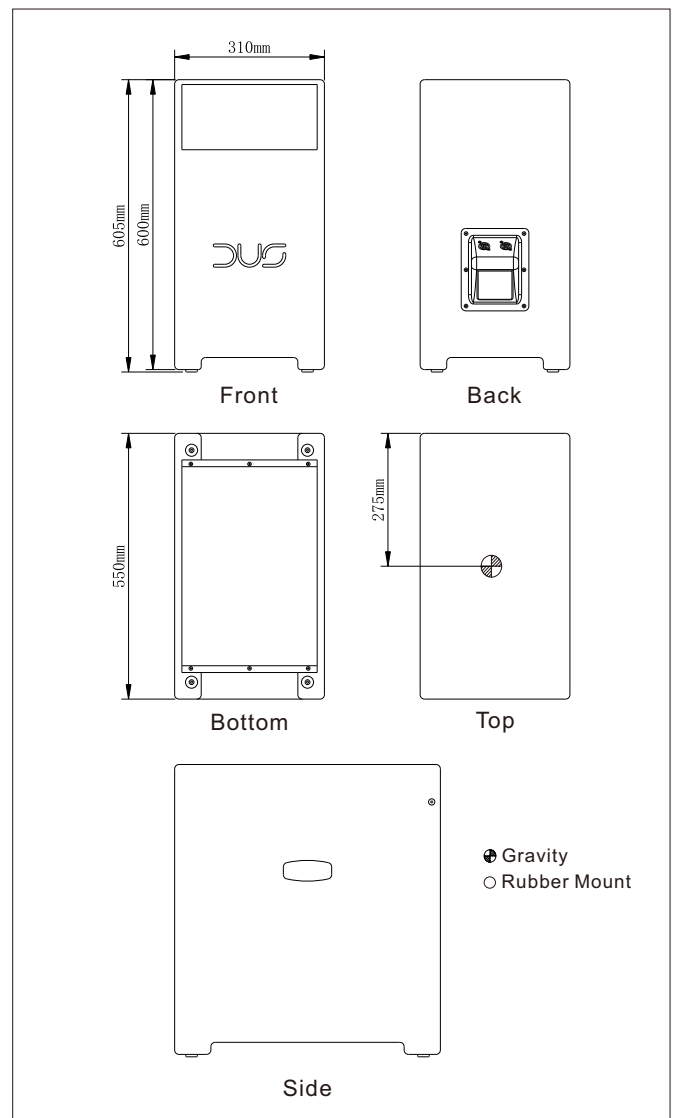

Frequency Response&Impedance

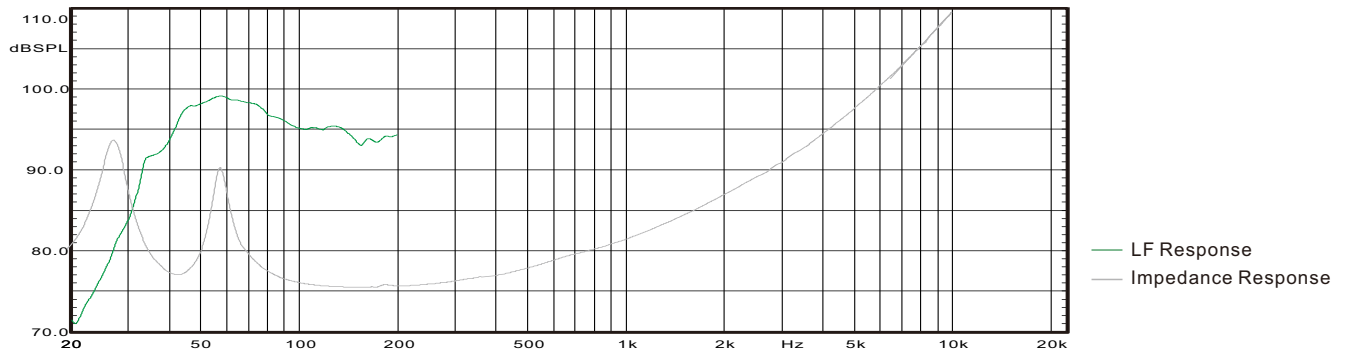

Phase Curve

