

# HE502


HE SERIES

HE502 is a two-way passive micro speaker designed for discreet positioning in architectural installations. HE502 featured 2 piece 5 inch low-frequency transducers and 6 piece 1 inch cloth dome tweeters. HE502 with precise phase, balanced frequency response, constant directivity coverage. Multiple tweeters set up enhanced directivity, same time be beneficial to increase the SPL. cooperate with other product from HE series will be AV space configuration.




Acoustic Performance	
System	2-way Loudspeaker System
Frequency Range(-10dB)	105Hz-20kHz
Frequency Range(±3dB)	120Hz-20kHz
Dispersion Angle	70°x50°( HxV )
Rated Power	250W
Maximum Power	1000W
Sensitivity(1w/1m)	95dB
Maximum SPL	125dB
Loudspeakers	LF:2x5" HF:6x1"
Nominal Impedance	4Ω
Connections	1 Connector


Physical Performance	
Hoisting Way	4 Hoisting Point with M8
Size(WxDxH)	235x175x310(mm)
Weight	N.W:8kg R.W:10.5kg

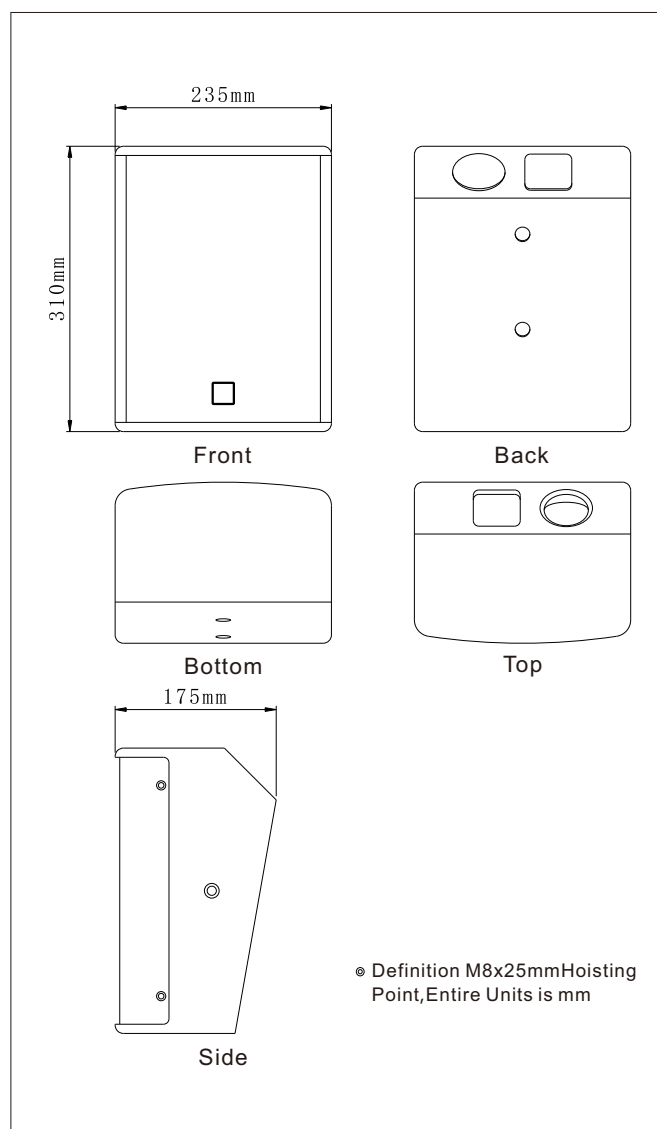


### Frequency Response & Impedance

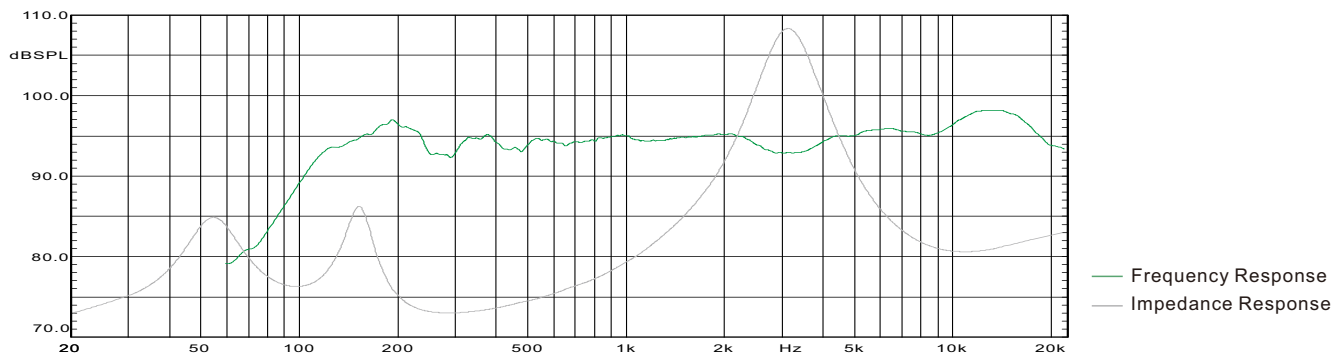

### Frequency Response in Horizontal

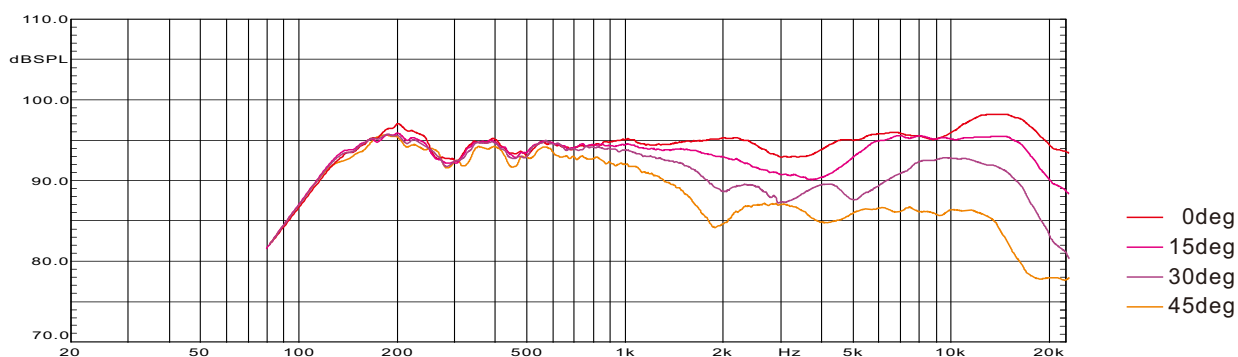

### Frequency Response in Vertical

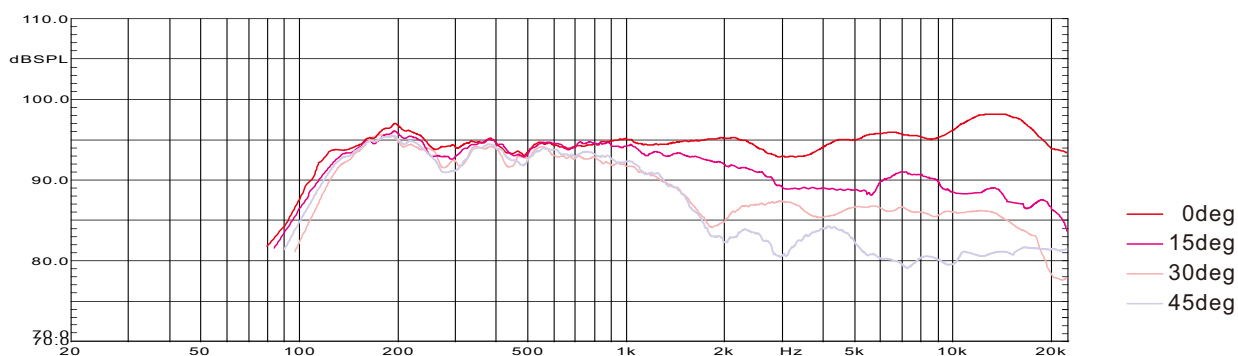

### Phase Curve

