

DSW12AP

DSW SERIES


DSW12AP featured 12inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 97dB, maximum 129dB. DX12AP featured CLASS-D AMP, provided small size, light weight, high efficiency, lower exothermic characteristic. Configuration work with DSW12 to extend Low-frequency.

DX12AP also featured DSP processor with processing parameters, can obtain carefully processed frequency response, corrected phase.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	40Hz-300Hz
Frequency Range (±3dB)	45Hz-250Hz
Rated Power	400W
Maximun Power	1600W
Sensitivity(1w/1m)	97dB
Maximum SPL	129dB
Loudspeakers	1x12"
Nominal Impedance	8Ω
Connections	Module/1input&1outpuy 800w/1xNLT4

Physical Performance	
Size(WxDxH)	360x550x680(mm)
Weight	N.W:30.5kg R.W:33.5kg

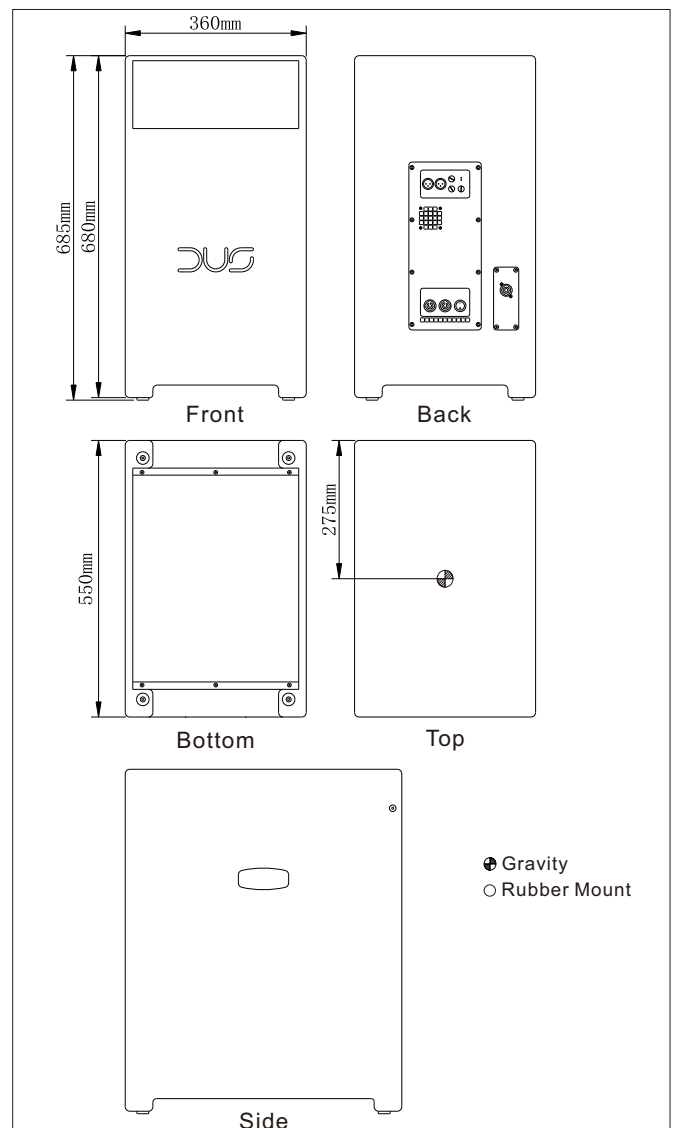

Frequency Response&Impedance

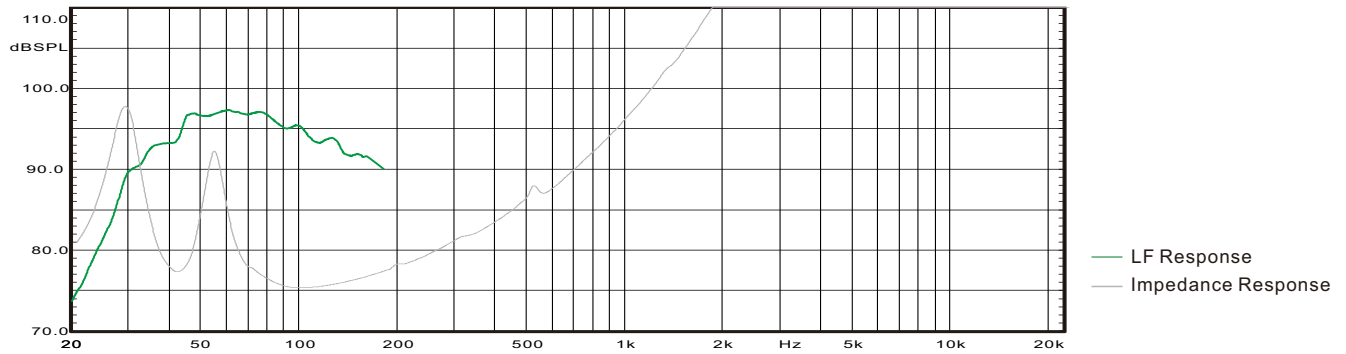

Phase Curve

