

DXB150

DXB SERIES

DXB150 featured 8inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 91dB, maximum 119dB. Compact size efficiency output can be placed in any corner, cooperate DX4.1&DX5.1, small frequency speaker meet all small meals, multi-functional conference room, household hi-fi stereo etc. The high quality of amplification.




Acoustic Performance


System	Subwoofer
Frequency Range (-10dB)	35Hz-400Hz
Frequency Range (±3dB)	45Hz-300Hz
Rated Power	150W
Maximum Power	600W
Sensitivity(1w/1m)	91dB
Maximum SPL	119dB
Loudspeakers	1x8"
Nominal Impedance	8Ω
Connections	2xNLT4±1

Physical Performance

Size(WxDxH)	250x400x310(mm)
Weight	N.W:10kg R.W:13.5kg

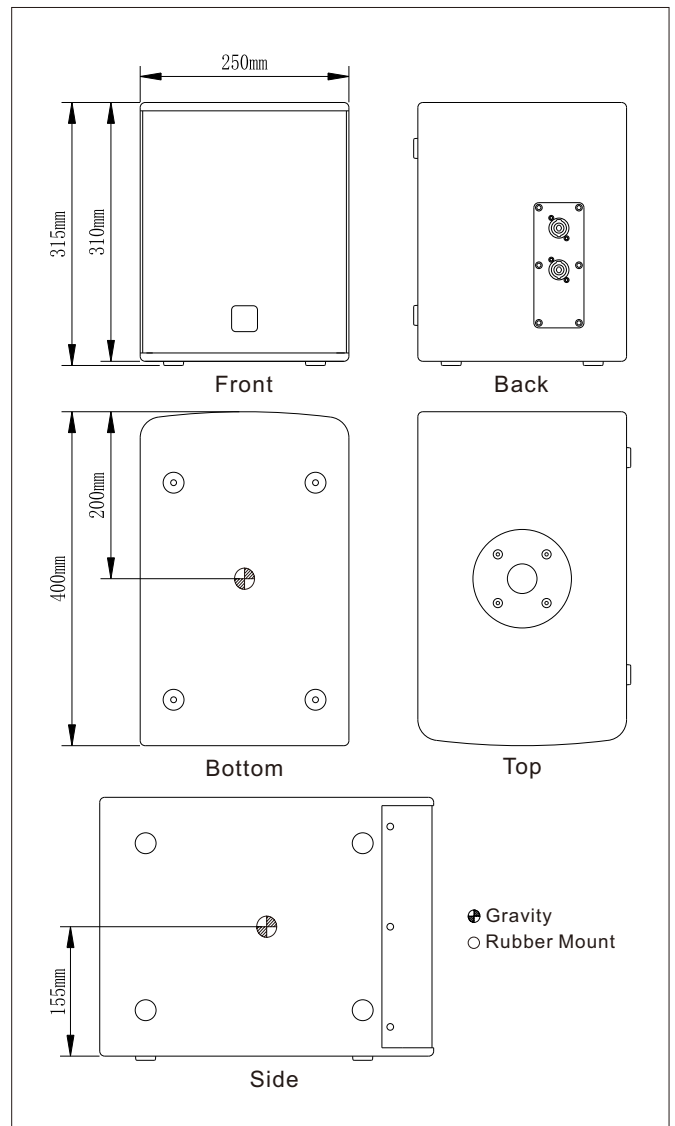

Frequency Response&Impedance

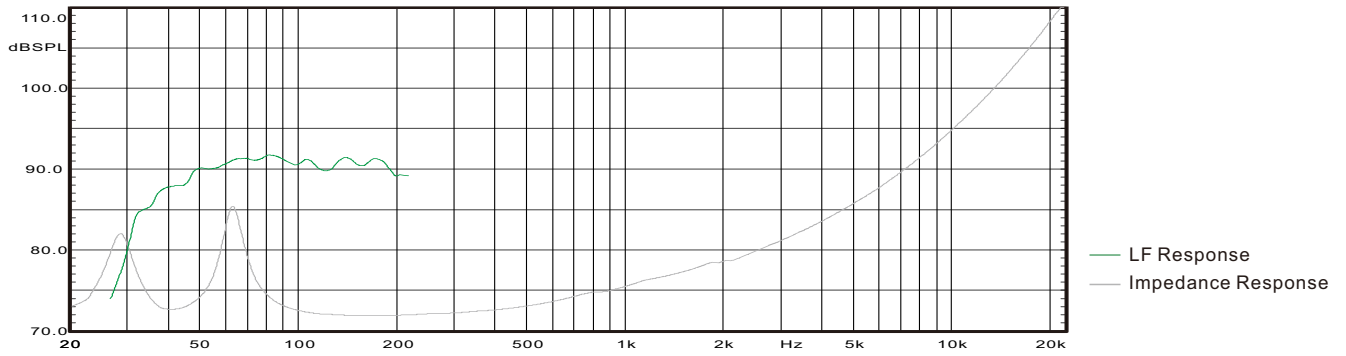

Phase Curve

