

Q08SWAP


Q SERIES

Q08SWAP featured 18inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 98dB, maximum 132dB. Q08SWAP featured CLASS-D AMP, provided small size, light weight, high efficiency, lower exothermic characteristic. Configuration work with Q08SW to extend Low-frequency. Q08SWAP also featured DSP processor with processing parameters, can obtain carefully processed frequency response, corrected phase.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	35Hz-300Hz
Frequency Range (± 3 dB)	38Hz-200Hz
Rated Power	600W
Maximun Power	2400W
Sensitivity(1w/1m)	98dB
Maximum SPL	132dB
Loudspeakers	1x18"
X-over	120Hz/24dB/octave
Nominal Impedance	8 Ω
Connections	2xNLT4 ± 1 BASS/ ± 1 LF/ ± 2 HF

Physical Performance	
Hoisting Way	Hoisting with 4
Size(WxDxH)	520x725x580(mm)
Weight	N.W:54kg R.W:59.8kg

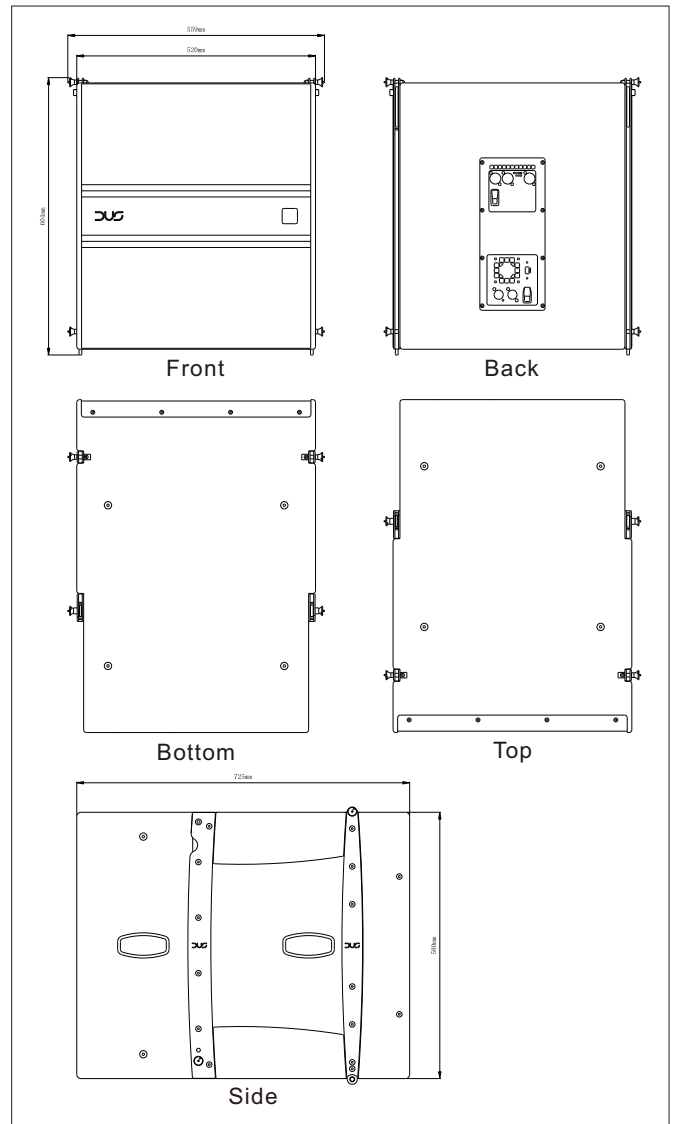

Frequency Response&Impedance

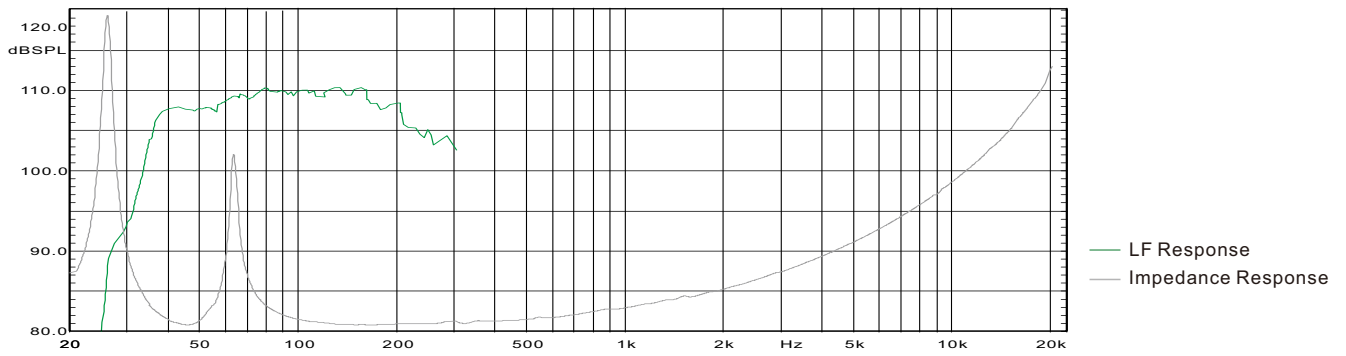

Phase Curve

