

DXB550

DXB SERIES

DXB550 featured double 10inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 95dB, maximum 127dB. Compact size efficiency output can be placed in any corner, cooperate DX4.1&DX5.1, can be used for small meals, multi-functional conference room, household hi-fi stereo etc. The high quality of amplification.




Acoustic Performance


System	Subwoofer
Frequency Range (-10dB)	30Hz-400Hz
Frequency Range (±3dB)	40Hz-300Hz
Rated Power	400W
Maximun Power	1600W
Sensitivity(1w/1m)	95dB
Maximum SPL	127dB
Loudspeakers	2x10"
Nominal Impedance	4Ω
Connections	2xNLT4±1

Physical Performance

Hoisting Way	12 Hoisting Point with M8
Size(WxDxH)	290x540x585(mm)
Weight	N.W:22.3kg R.W:25.5kg

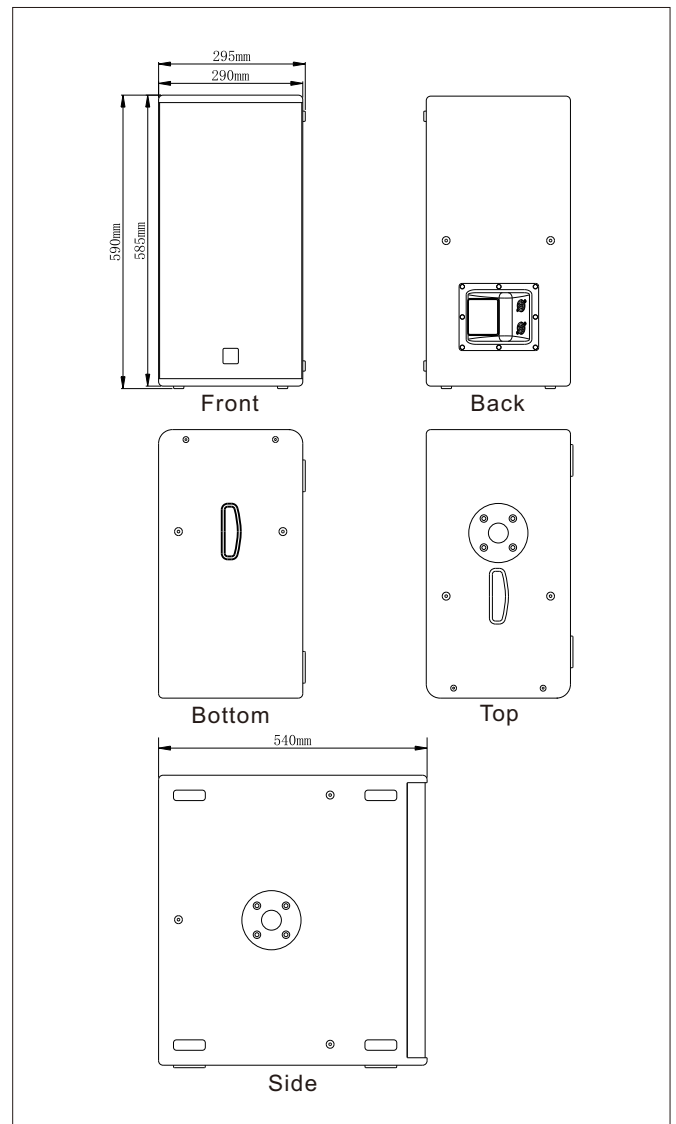

Frequency Response&Impedance

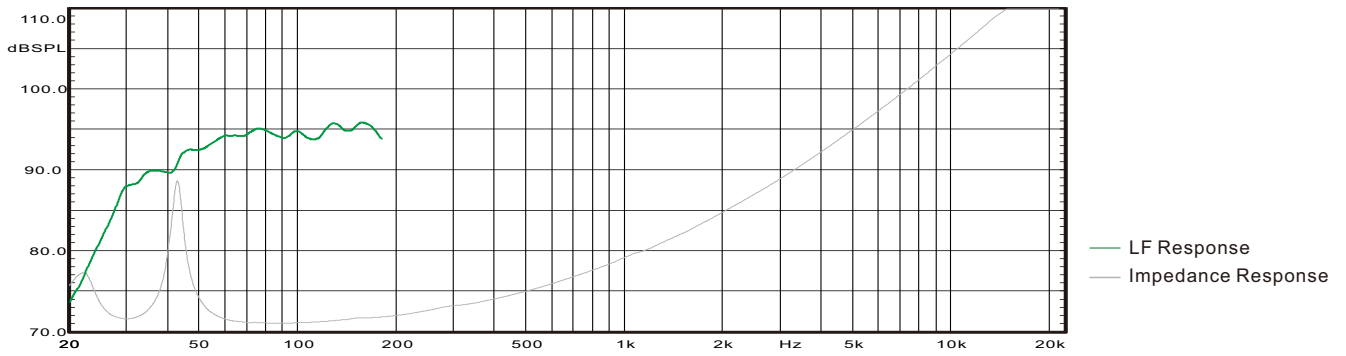

Phase Curve

