


# GD-380C


GD SERIES

GD-380C featured 10inch low-frequency transducers with high-power configuration. Profit by cabinet natural extension of the transmission line design, effectively increase and improves the low-frequency response and sensitivity, without any other increase other subwoofer extra burden can be reach to 95dB, maximum 126dB. Compact size efficiency output can be placed in any corner, cooperate DX4.1&DX5.1, can be used for small meals and AV space configuration.




Acoustic Performance	
System	Subwoofer
Frequency Range (-10dB)	30Hz-400Hz
Frequency Range ( $\pm 3$ dB)	40Hz-350Hz
Rated Power	250W
Maximun Power	1000W
Sensitivity(1w/1m)	95dB
Maximum SPL	126dB
Loudspeakers	1x10"
Nominal Impedance	8 $\Omega$
Connections	2xNLT4 $\pm 1$

Physical Performance	
Hoisting Way	16 Hoisting Point with M8
Size(WxDxH)	1750x303x195(mm)
Weight	N.W:30.5kg R.W:37.5kg

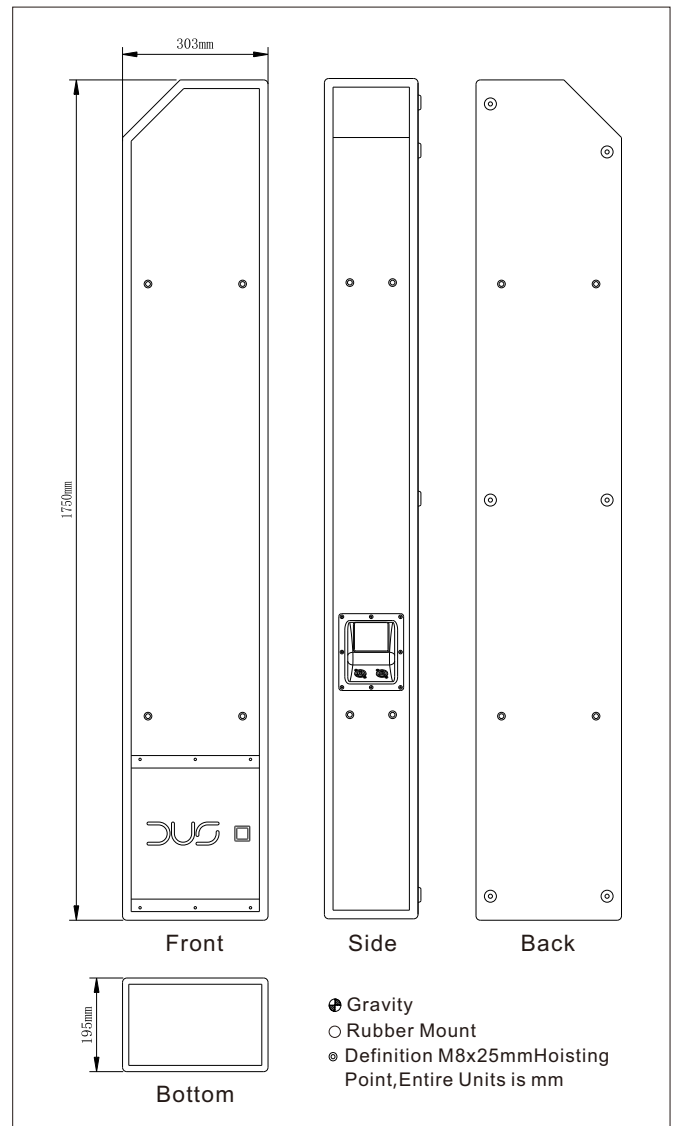

Frequency Response&Impedance

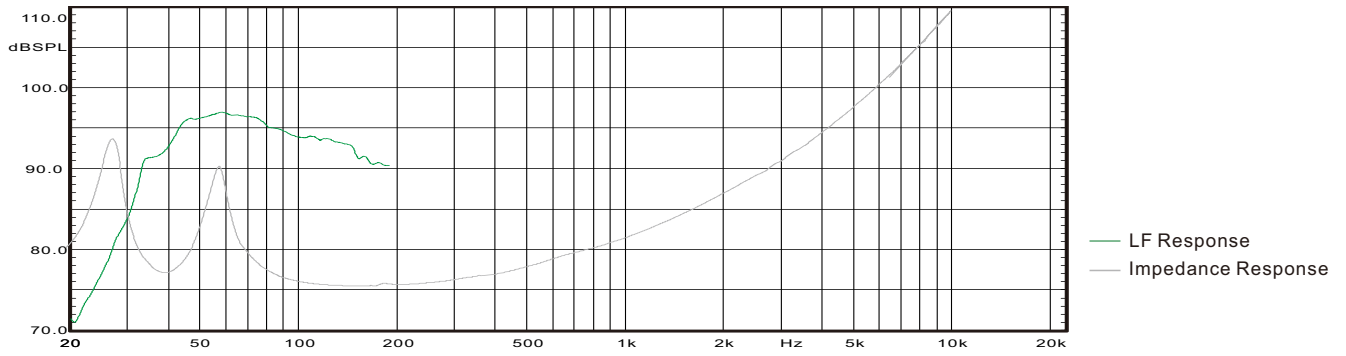

Phase Curve

